

Kol. Opis

1 CONLIFT1 LS



Paznja! Slika proizvoda se može razlikovati od stvarnog proizvoda

Proizvodni broj: [98452219](#)

Applications

The Conlift1 is suitable for the pumping of condensate which is collected below sewer level or which cannot flow to the sewage system or drain of the building by means of a natural downward slope.

Typical applications:

- Condensate boilers.
- For condensate with a pH value above 2.5.
- For condensate from air-conditioning systems, cooling and refrigeration systems, air dehumidifiers and evaporators.
- For condensate with a pH value below 2.5, use Conlift2 pH+.

Features

- Fully sealed against moisture and evaporation.
- Quick and easy installation.
- Very silent and smooth operation.
- Can be mounted on the floor or on a wall.
- Pre-assembled non-return valve.
- Pump operation test button.
- Incorporates high-water float switch.
- Fully automatic operation.
- Inlet and discharge hose connectors included.

PRV connection:

The discharge of pressure relief valves (PRV) of condensing boilers (<40kW) can be connect to the unit when discharge temperature not exceeds 90°C for a period of max. 5 Min.

Discharge connection from PRV shall be according to boiler manufacturers instructions.

Tečnost:

Dizana tečnost: bilo koja viskozna tečnost

Maximum liquid temperature: 323 K

Gustina: 998.2 kg/m³

Tehnički:

Saglasnosti na natpisnoj pločici: VDE, GOST

Ugradnja:

Ulaz pumpe: 18-30

Izlaz pumpe: 8-10

Elektro podaci:

Potrebna snaga - P1: 75 W


Kol. Opis

Frekvencija struje: 50 Hz
Potrebni napon: 1 x 230 V
Nazivna struja: 0.65 A
Klasa zaštite (IEC 34-5): IP20
Klasa izolacije (IEC 85): F
Dužina kabla: 1.7 m
Tip kablovskog utikača: NO PLUG

Rezervoar:
Ukupna zapremina rezervoar(a): 2.65 l

Ostali:
Neto masa: 4.1 kg
Country of origin: CN
Custom tariff no.: 84137021

98452219 CONLIFT1 LS 50 Hz

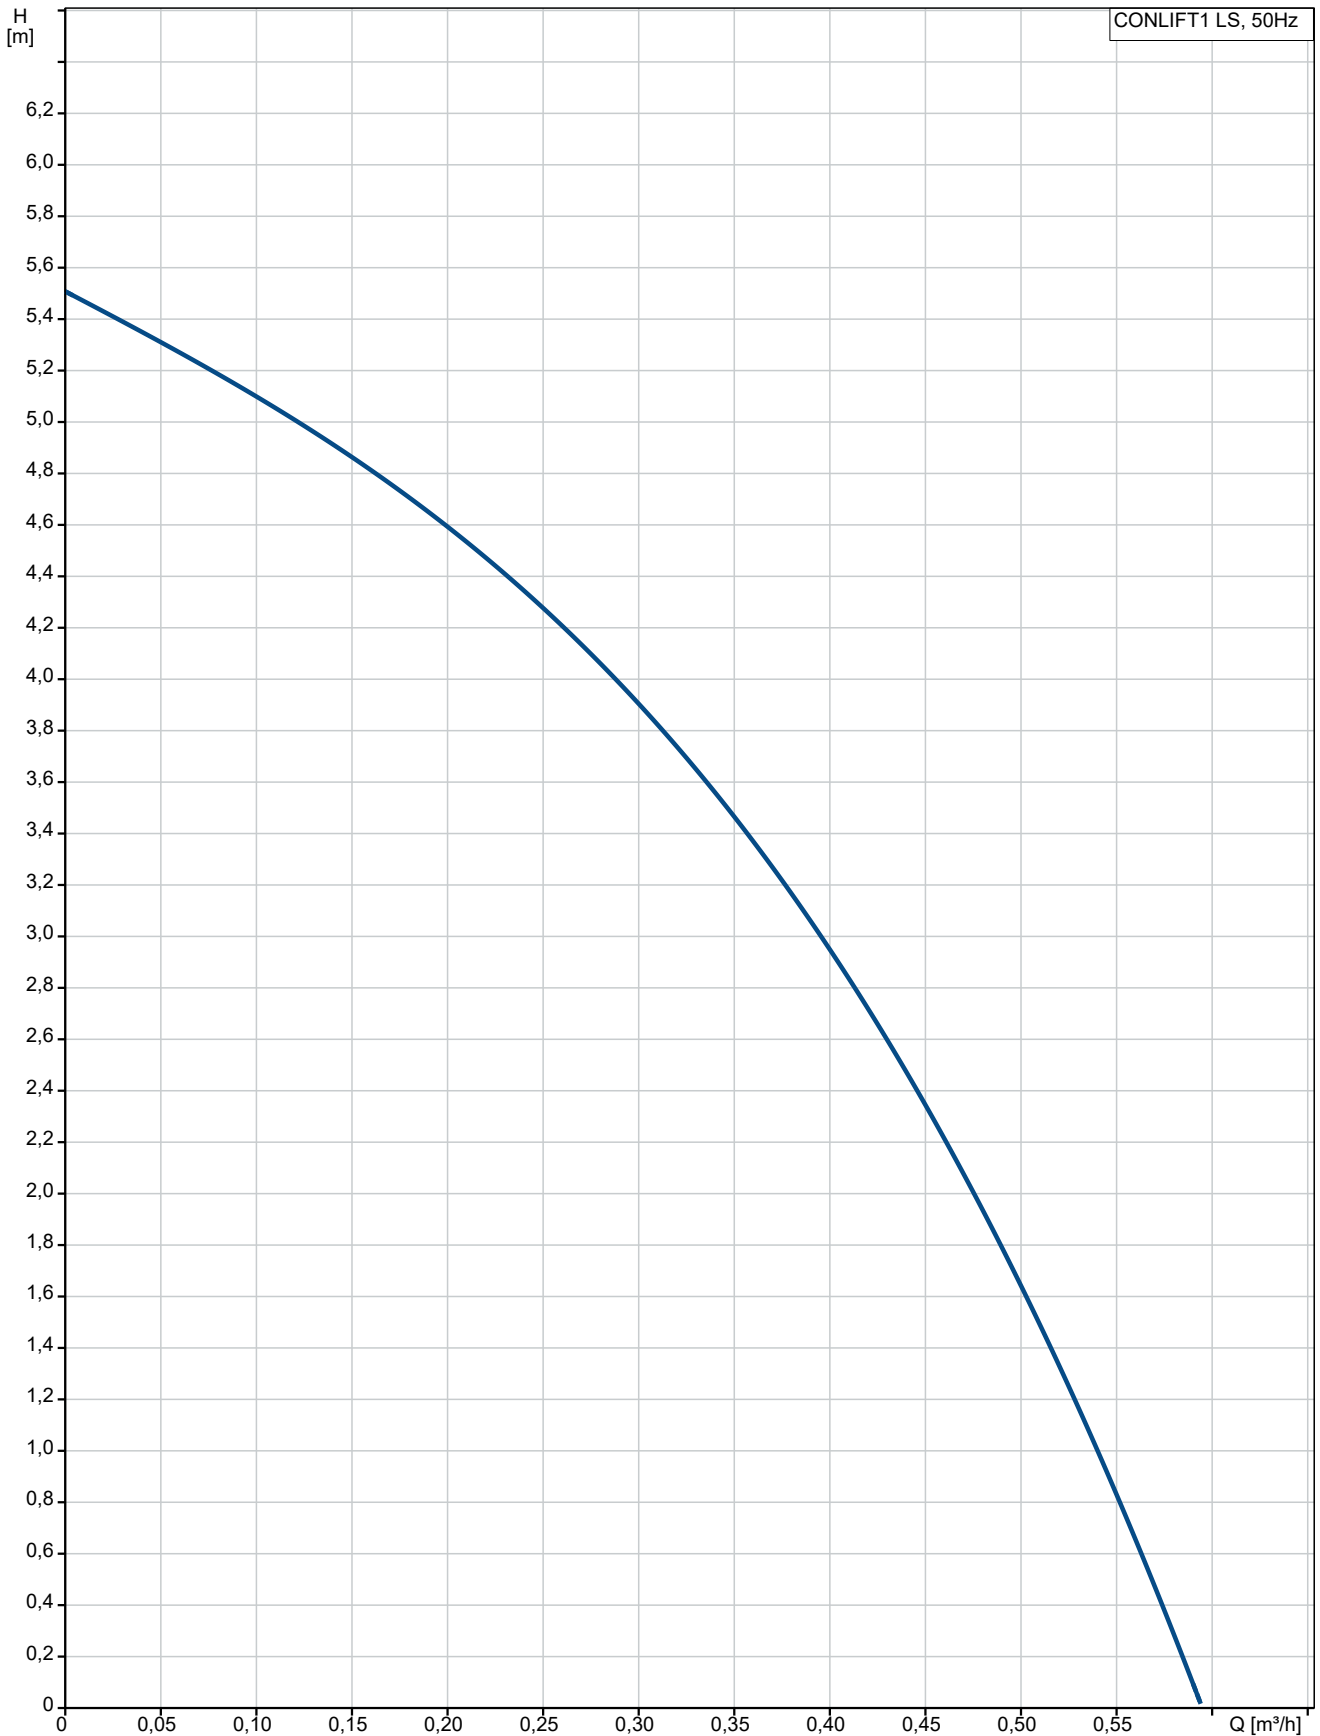




Naziv firme:

Napravio:




Telefon:

Datum: 15.4.2021.

Opis	Vrednost
Opšte informacije:	
Ime proizvoda::	CONLIFT1 LS
Šifra proizvoda:	98452219
EAN broj::	5711495291235
Cena:	€ 59.15
Tehnički:	
Maximum flow:	0.6 m ³ /h
Max. protok:	0.6 m ³ /h
Visina max.:	5.5 m
Saglasnosti na natpisnoj pločici:	VDE, GOST
Ugradnja:	
Ulaz pumpe:	18-30
Izlaz pumpe:	8-10
Tečnost:	
Dizana tečnost:	bilo koja viskozna tečnost
Maximum liquid temperature:	323 K
Gustina:	998.2 kg/m ³
Min. pH-vrednost:	2.7
Elektro podaci:	
Potrebna snaga - P1:	75 W
Frekvencija struje:	50 Hz
Potrebni napon:	1 x 230 V
Nazivna struja:	0.65 A
Klasa zaštite (IEC 34-5):	IP20
Klasa izolacije (IEC 85):	F
Dužina kabla:	1.7 m
Tip kablovskog utikača:	NO PLUG
Napojni kabl:	H05W-F36
Rezervoar:	
Ukupna zapremina rezervoar(a):	2.65 l
Ostali:	
Neto masa:	4.1 kg
Country of origin:	CN
Custom tariff no.:	84137021

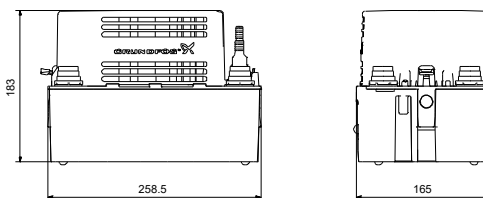


98452219 CONLIFT1 LS 50 Hz

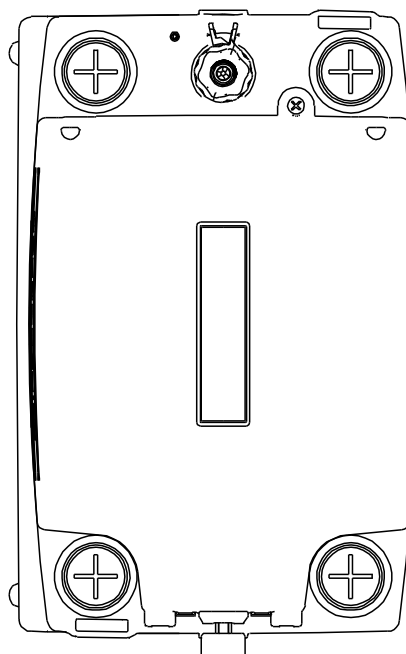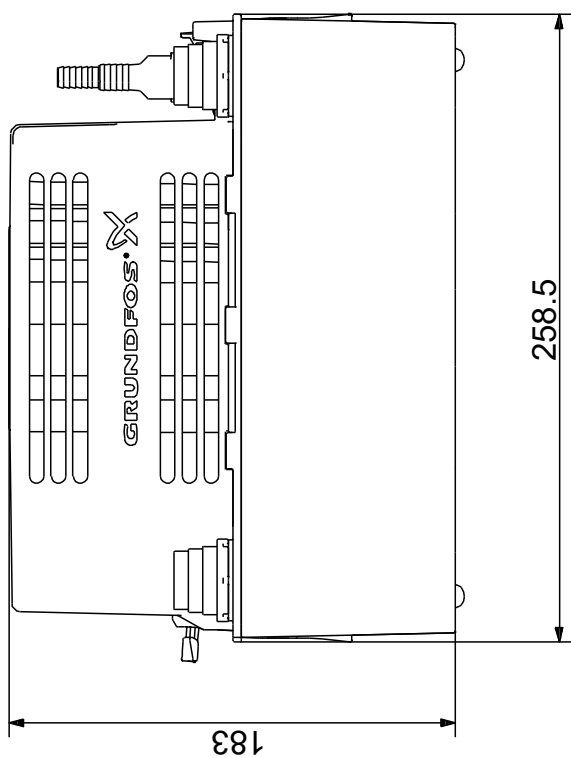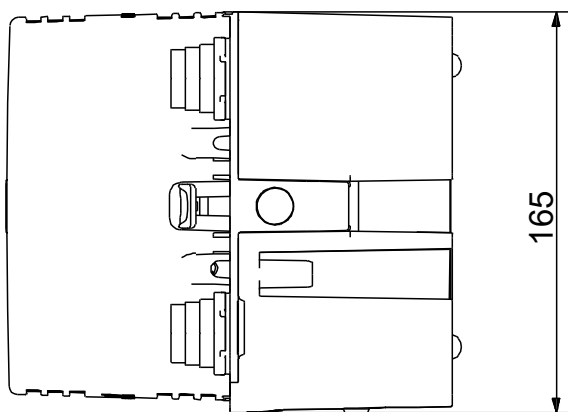

Napomena! Sve jedinice su u [mm]ukoliko drugačije nije navedeno.
Upozorenje: Ovaj pojednostavljeni dimenzioni crtež ne pokazuje sve detalje.

98452219 CONLIFT1 LS 50 Hz

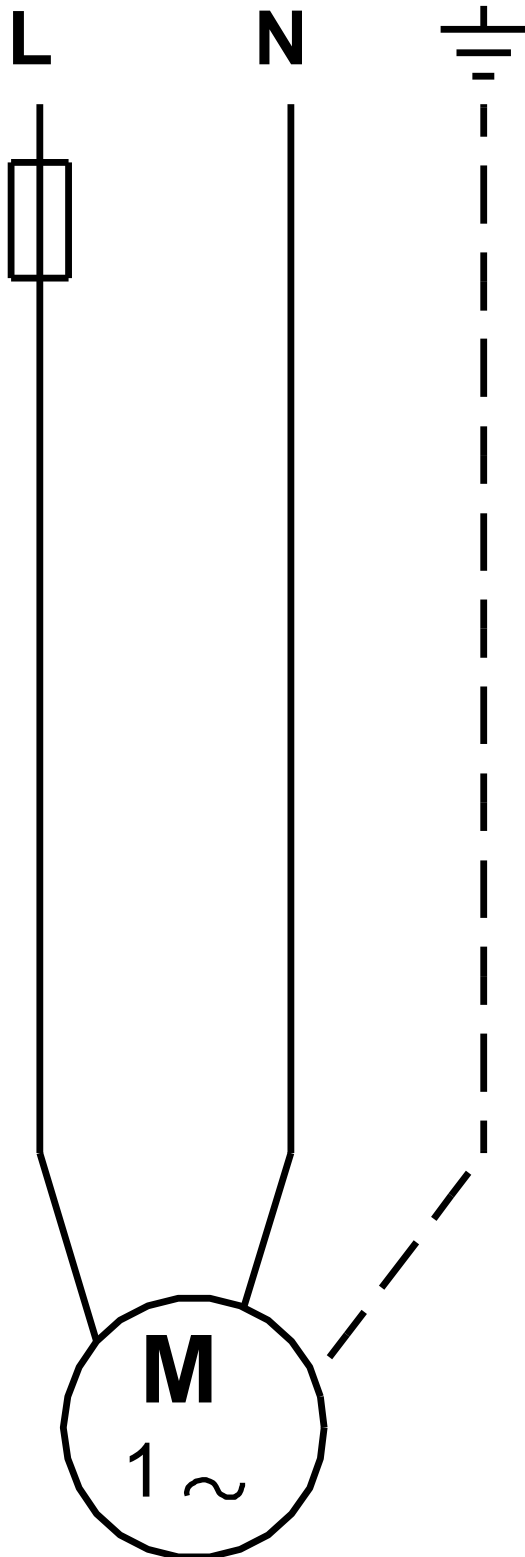

Pažnja! Sve jedinice su u [mm] ukoliko nije rečeno drugačije.