

Cool Aleternum®



Mala toplotna inercija



Nizak sadržaj vode



Prilagodljivost



16
bar

Radni pritisak



Dostupno u 24 boje



U pakovanju se nalazi i set za montažu.

Dostupne međuosne
udaljenosti



400 mm
450 mm
500 mm
550 mm
600 mm

Dostupne visine

858 mm
1152 mm
1488 mm
1740 mm

Unutrašnji antikoroziivni tretman **Aleternum** serije

Svi modeli **Cool** su pod garancijom **12 godina** od datuma ugradnje protiv proizvodnih grešaka, pod uslovom da se ugradnja obavlja na odgovarajući način, u skladu sa važećim propisima i odredbama koje se odnose na ugradnju, upotrebu i pravilno održavanje navedene u ovom katalogu.

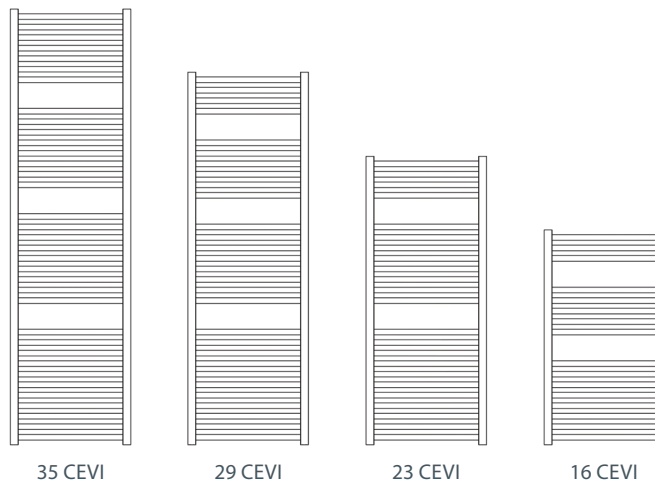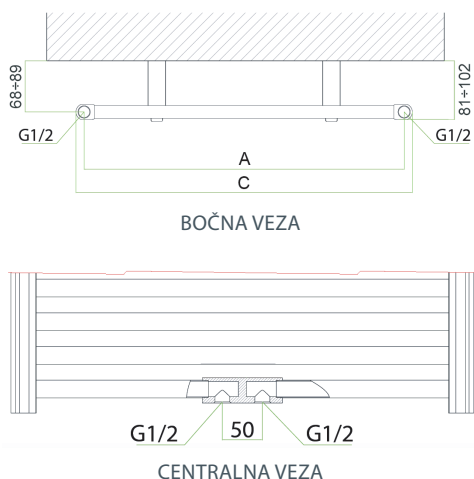

Model	Visina mm	Termička snaga		
		ΔT 30	ΔT 50	ΔT 60
		W	W	W
860/400	858	188	347	433
860/450	858	196	370	464
860/500	858	211	399	501
860/550	858	226	428	537
860/600	858	241	457	574
1160/400	1152	248	458	571
1160/450	1152	265	502	630
1160/500	1152	288	544	684
1160/550	1152	310	587	737
1160/600	1152	333	630	791

Model	Visina mm	Termička snaga		
		ΔT 30	ΔT 50	ΔT 60
		W	W	W
1490/400	1488	322	595	741
1490/450	1488	347	657	826
1490/500	1488	378	717	900
1490/550	1488	410	776	974
1490/600	1488	441	835	1049
1740/400	1740	379	707	882
1740/450	1740	413	778	976
1740/500	1740	451	850	1066
1740/550	1740	489	922	1156
1740/600	1740	527	994	1247

Model	Visina	Dubina	Udaljenost	Dužina	Sadržaj vode	Ekspozent	Koeficijent
	mm	mm	mm	mm	litara	n	Km
860/400	858	26	400	428	2,4	1,2015	3,1596
860/450	858	26	450	478	2,7	1,2443	2,8430
860/500	858	26	500	528	2,9	1,2468	3,0374
860/550	858	26	550	578	3,2	1,2492	3,2277
860/600	858	26	600	628	3,4	1,2517	3,4143
1160/400	1152	26	400	428	3,4	1,2029	4,1431
1160/450	1152	26	450	478	3,8	1,2479	3,8033
1160/500	1152	26	500	528	4,1	1,2486	4,1171
1160/550	1152	26	550	578	4,5	1,2495	4,4259
1160/600	1152	26	600	628	4,9	1,2502	4,7339
1490/400	1488	26	400	428	4,4	1,2045	5,3470
1490/450	1488	26	450	478	4,8	1,2520	4,9057
1490/500	1488	26	500	528	5,2	1,2509	5,3720
1490/550	1488	26	550	578	5,7	1,2497	5,8423
1490/600	1488	26	600	628	6,1	1,2486	6,3166
1740/400	1740	26	400	428	5,3	1,2182	6,0193
1740/450	1740	26	450	478	5,7	1,2406	6,0741
1740/500	1740	26	500	528	6,3	1,2408	6,6300
1740/550	1740	26	550	578	6,8	1,2410	7,1851
1740/600	1740	26	600	628	7,5	1,2412	7,7391

Maksimalni radni pritisak: 1600 kpa (16 bara) Maksimalna radna temperatura: 120 °C

Karakteristična jednačina modela $\Phi = Km \Delta T^n$

Obavljene vrednosti termičke snage su u skladu sa standardom SRPS EN 442-2-2012 i sertifikovane su od strane "Mašinskog fakulteta u Nišu", laboratorija za termotehniku, termoenergetiku i procesnu tehniku.

PRIMER FORMIRANJA ŠIFRE

Cool sušač 860/400, sjajno bele boje
Šifra: **EA42E0 04**







Cool sušač 1160/500, sjajne Slate Grey boje
Šifra: **EA52G0 3B**

Da biste formirali šifru radijatora, potrebno je da mu odredite dve poslednje cifre koje se odnose na završni sloj i željenu boju.

Model	Verzija bočnog priključka		Verzija centralnog priključka	
	Bela RAL 9010	Boje	Bela RAL 9010	Boje
860/400	EA42E0 04	EA52E0 xx	EA62E0 04	EA62E0 xx
860/450	EA42A0 04	EA52A0 xx	EA62A0 04	EA62A0 xx
860/500	EA42B0 04	EA52B0 xx	EA62B0 04	EA62B0 xx
860/550	EA42C0 04	EA52C0 xx	EA62C0 04	EA62C0 xx
860/600	EA42D0 04	EA52D0 xx	EA62D0 04	EA62D0 xx
1160/400	EA42L0 04	EA52L0 xx	EA62L0 04	EA62L0 xx
1160/450	EA42F0 04	EA52F0 xx	EA62F0 04	EA62F0 xx
1160/500	EA42G0 04	EA52G0 xx	EA62G0 04	EA62G0 xx
1160/550	EA42H0 04	EA52H0 xx	EA62H0 04	EA62H0 xx
1160/600	EA42I0 04	EA52I0 xx	EA62I0 04	EA62I0 xx
1490/400	EA42Q0 04	EA52Q0 xx	EA62Q0 04	EA62Q0 xx
1490/450	EA42M0 04	EA52M0 xx	EA62M0 04	EA62M0 xx
1490/500	EA42N0 04	EA52N0 xx	EA62N0 04	EA62N0 xx
1490/550	EA42O0 04	EA52O0 xx	EA62O0 04	EA62O0 xx
1490/600	EA42P0 04	EA52P0 xx	EA62P0 04	EA62P0 xx
1740/400	EA42V0 04	EA52V0 xx	EA62V0 04	EA62V0 xx
1740/450	EA42R0 04	EA52R0 xx	EA62R0 04	EA62R0 xx
1740/500	EA42S0 04	EA52S0 xx	EA62S0 04	EA62S0 xx
1740/550	EA42T0 04	EA52T0 xx	EA62T0 04	EA62T0 xx
1740/600	EA42U0 04	EA52U0 xx	EA62U0 04	EA62U0 xx

BOJE

Pogledajte tabelu na sledećoj stranici

Artikal	Opis	Šifra
	A 77 Instalacioni komplet za Cool, centralni nosači u 3 tačke sa odzračnim ventilom i 1 čepom - Boja: bela (standardna isporuka)	550124
	A 79 Instalacioni komplet za Cool, centralni nosači u 3 tačke sa odzračnim ventilom i 3 čepa - Boja: hrom (standardna isporuka)	550126
	A 78 Instalacioni komplet za Cool, centralni nosači u 3 tačke sa odzračnim ventilom i 1 čepom - Boja: hrom (standardna isporuka)	550125
	A 89 Instalacioni komplet za Cool, centralni nosači u 3 tačke sa odzračnim ventilom i 3 čepa - Boja: hrom (standardna isporuka)	550127
	- Beli nosači za Cool - n° 2	570135
	- Hromirani nosači za Cool - n° 2	570135C
	- Držač peškira Cool 450/500/550 – Boja: bela	570133
	- Držač peškira Cool 600 – Boja: bela	570134
	- Držač peškira Cool 450/500/550 – Boja: hrom	570133C
	- Držač peškira Cool 600 – Boja: hrom	570134C


Ventili serije **TONDERA** za centralni priključak

Opis	Boja bela RAL 9010	Boja Hrom
	Šifra	Šifra
Ugaoni termostatski ventil (50mm), bakarni ili višeslojni cevni priključak, desni	8496811	8496812
Ugaoni termostatski ventil (50mm) sa termoglavom, bakarni ili višeslojni cevni priključak, desni	8496841	8496842




Opis	Boja Zlatna
	Šifra
Revizibilni vijak za promenu TONDERA termo glave na levu stranu	8490471

CLASSIC




PURE WHITE RAL 9010
Cod.04



NEUTRAL WHITE
Cod.06




SILVER
Cod.07



GRAPHITE
Cod.3R



SLATE GREY
Cod.3B



BLACK COFFEE
Cod.3V



BRONZE
Cod.08

STYLE



LIGHT SHELL
Cod.09



LIGHT GREY
Cod.10



MIDNIGHT GREEN
Cod.12



MIDNIGHT BLUE
Cod.11



BLACK RAVEN
Cod.3L



CHOCOLATE
Cod.13



CINNAMON
Cod.14



FOREST GREEN
Cod.16



DUSTY ROSE
Cod.15

SPECIAL



THE FONDITAL RED
Cod.2A



HAMMERED BLACK
Cod.17